

KWO® MultiTex® S 8 – ePTFE Gasket with diffusion barrier



KWO® MultiTex® S 8 is produced from 100% pure expanded PTFE without any pigments, inks or adhesives, and therefore especially suitable for clean applications.

A diffusion barrier ensures very high sealability at very low gasket stress.

The flexible material adapts well to sealing surfaces, compensates irregularities and seals at very low stresses.

Suitable for use in metallic flanged, as well as stress sensitive connections.

Seals most chemicals across the whole pH range (0-14).



★ Advantages

- > Adapts well to sealing surfaces, compensates irregularities
- > Superior resistance to creep and cold flow
- > Very high sealability especially at very low stresses

⚙ Properties

- > High chemical resistance
- > UV resistant, non-ageing, unlimited storable
- > nontoxic, biologically inert

🏠 Applications

- > Flange connections
- > Heat exchangers
- > Reactors, glass lined flanges
- > Uneven or distorted flanges
- > Pharmaceutical- und food processing equipment

🏆 Approvals / Compliance

- > BAM – suitable for use with fluid and gaseous oxygen
- > TA-Luft regulation and blow out safety acc. to VDI 2200
- > Specific values according to DIN EN 13555
- > FDA 21 CFR 177.1550
- > EC1935/2004 suitable for applications with food contact
- > USP Plastic Class for pharmaceutical applications

TECHNICAL DATA

Material	100% biaxial expanded PTFE (ePTFE) without fillers, without pigments or ink
Chemical resistance	In the entire pH range (pH 0-14, except molten alkali metals and elemental fluorine)
Temperature range	-268°C (-450°F) up to +270°C (+518°F), short-term +315°C (+600°F)

All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. KWO's terms and conditions of sale apply to the purchase and sale of the product.

Pressure range


Vacuum up to +200bar (3000psi) depending on the installation situation*

*Note: temperature and pressure guides cannot necessarily be used simultaneously.



Quality assurance

The KWO Quality Management is certified according to DIN EN ISO 9001. Our suppliers are also integrated in this quality system. We use exclusively high quality raw materials in the fabrication of our products, which provide the highest level of safety and reliability.

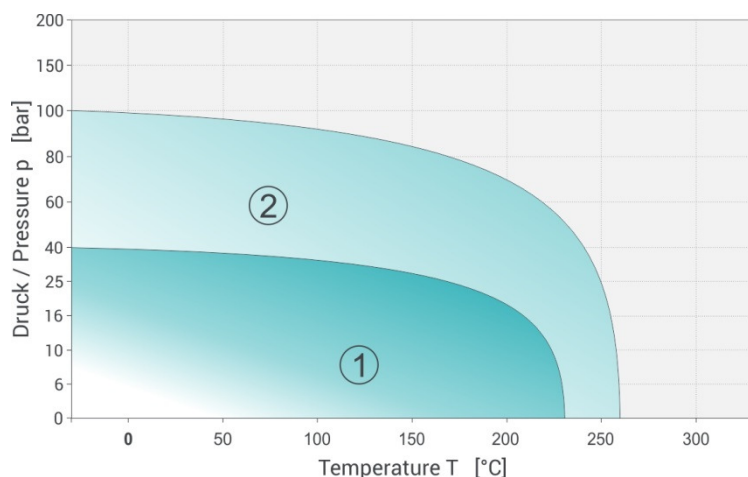



The p-T diagram indicates the service limits considering the simultaneous influence of pressure and temperature.

Range 1: Typical service limits

Range 2: Maximum application limits, after technical verification

Values

Q_{MIN} (0,01)	28 Mpa	DIN EN 13555
Q_{S MIN} (0,01)	<<10 Mpa	DIN EN 13555
PQR (30 MPa 20°C)	0,94	DIN EN 13555
PQR (30 MPa 150°C)	0,67	DIN EN 13555

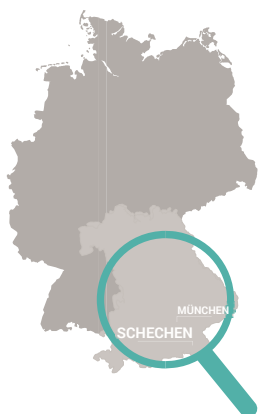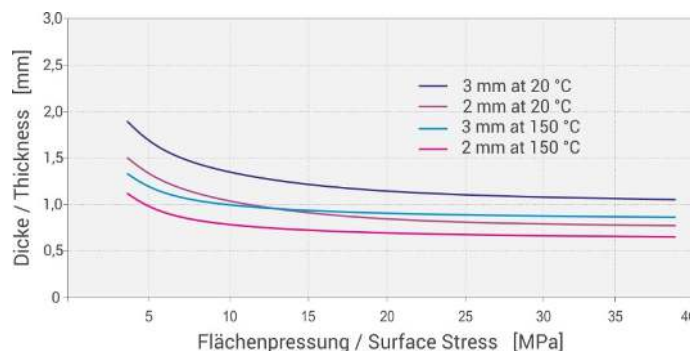

- ✓ Made in Germany
- ✓ International Presence
- ✓ Represented in over 40 countries

For detailed selection criteria, technical information, installation guideline and the relevant contact person, please visit our website: www.kwo-ptfe.de

KWO Dichtungstechnik GmbH

Am Eschengrund 3
 83135 Schechen, Germany
 Tel: + 49 8039 90254-0
 Fax: + 49 8039 90254-299
 Email: info@kwo-ptfe.de



All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. KWO's terms and conditions of sale apply to the purchase and sale of the product.